



# FREE FLOAT<sup>®</sup> STEAM TRAP


## MODEL JH5RL-X/JH5RL-B JH5RH-B CAST STEEL

### FREE FLOAT STEAM TRAP WITH THERMOSTATIC AIR VENTING

#### Features

**A reliable and durable cast steel steam trap for use on small to medium-size process equipment. JH5RL-B/JH5RH-B are also suitable for both superheated and high-pressure process equipment.**

1. Self-modulating free float provides continuous, smooth, low-velocity condensate discharge as process loads vary.
2. Precision-ground float, constant water seal and three-point seating design ensure a steam-tight seal, even under no-load conditions.
3. Only one moving part, the free float, prevents concentrated wear and provides a long maintenance-free service life.
4. **JH5RL-X**: Thermostatic capsule (X-element) with "fail open" feature vents air automatically at close-to-steam temperature.
5. **JH5RL-B/JH5RH-B**: Thermostatic bimetal air vent valve vents air automatically for rapid startup.
6. Built-in screen with large surface area ensures extended trouble-free operation.
7. Easy, inline access to internal parts simplifies cleaning and reduces maintenance costs.

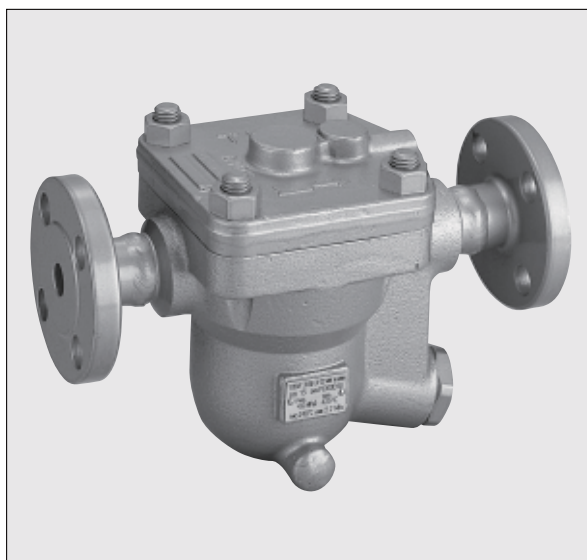

#### Specifications

Model	JH5RL-X			JH5RL-B			JH5RH-B		
	Screwed	Socket Welded	Flanged	Screwed	Socket Welded	Flanged	Socket Welded	Flanged	
Connection									
Size	1/2", 3/4", 1"	DN15, 20, 25, 40, 50			1/2", 3/4", 1"	DN15, 20, 25, 40, 50			
Orifice No.		5, 10, 14, 22, 32		2, 5, 10, 14, 22, 32, 40, 46			80		
Maximum Operating Pressure (barg) PMO		5, 10, 14, 22, 32		2, 5, 10, 14, 22, 32, 40, 46			80		
Maximum Differential Pressure (bar) ΔPMX		5, 10, 14, 22, 32		2, 5, 10, 14, 22, 32, 40, 46			80		
Maximum Operating Temperature (°C) TMO		240			400*/425			400*/425	
Type of Air Vent		X-element (6 °C subcooling)			Bimetal (vents air up to approx. 100 °C)				

PRESSURE SHELL DESIGN CONDITIONS (NOT OPERATING CONDITIONS):


Maximum Allowable Pressure (barg) PMA: 40 (JH5RL-X), 46 (JH5RL-B), 80 (JH5RH-B)  
 Maximum Allowable Temperature (°C) TMA: 400\*/425 \* With PN flange

1 bar = 0.1 MPa



To avoid abnormal operation, accidents or serious injury, DO NOT use this product outside of the specification range. Local regulations may restrict the use of this product to below the conditions quoted.

No.	Description	Material	DIN 1)	ASTM/AISI 1)
①	Body	Cast Steel A216 Gr.WCB	1.0619	—
②	Cover	Carbon Steel C22.8	1.0460	A105
③	Cover (JH5RH-B)	Cast Steel A216 Gr.WCB	1.0619	—
③ <sup>F</sup>	Float	Stainless Steel SUS316L	1.4404	AISI316L
④ <sup>R</sup>	Orifice	—	—	—
⑤ <sup>MR</sup>	Orifice Gasket	Soft Iron SUYP	1.1121	AISI1010
⑥	Orifice Plug	Cast Stainless Steel SCS2A	1.4027	A217 Gr.CA40
⑦ <sup>MR</sup>	Orifice Plug Gasket	Soft Iron SUYP	1.1121	AISI1010
⑧ <sup>R</sup>	Float Cover	Stainless Steel SUS304	1.4301	AISI304
⑨ <sup>R</sup>	Screen inside/outside 2)	Stainless Steel SUS430/304	1.4016/1.4301	AISI430/304
⑩	Socket 3)/ Flange	Carbon Steel C22.8	1.0460	A105
⑪	Cover Bolt	Alloy Steel SNB7	1.7225	A193 Gr.B7
	Cover Bolt (JH5RH-B)	Alloy Steel SNB16	1.7711	A193 Gr.B16
⑫	Cover Nut	Carbon Steel S45C	1.0503	AISI1045
⑬ <sup>MR</sup>	Cover Gasket	Graphite/Stainless Steel SUS316L	-/1.4404	-/AISI316L
⑭	Connector	Stainless Steel SUS416	1.4005	AISI416
⑮ <sup>MR</sup>	Connector Gasket	Graphite/Stainless Steel SUS316L	-/1.4404	-/AISI316L
⑯ <sup>R</sup>	X-element Guide	Stainless Steel SUS304	1.4301	AISI304
⑰ <sup>R</sup>	X-element	Stainless Steel	—	—
⑱ <sup>R</sup>	Spring Clip	Stainless Steel SUS304	1.4301	AISI304
⑲ <sup>R</sup>	Air Vent Valve Seat	Stainless Steel SUS420F	1.4208	AISI420F
⑳ <sup>R</sup>	Snap Ring	Stainless Steel SUS304	1.4301	AISI304
㉑ <sup>R</sup>	Air Vent Case	Cast Stainless Steel A351 Gr.CF8	1.4312	—
㉒ <sup>R</sup>	Bimetal Plate	Bimetal	—	—
㉓ <sup>R</sup>	Air Vent Screen	Stainless Steel SUS304	1.4301	AISI304
㉔ <sup>R</sup>	Air Vent Valve Seat	—	—	—
㉕ <sup>R</sup>	Air Vent Valve Plug	—	—	—
㉖ <sup>R</sup>	Snap Ring	Stainless Steel SUS304	1.4301	AISI304
㉗	Nameplate	Stainless Steel SUS304	1.4301	AISI304
㉘	Drain Plug Gasket 4)	Soft Iron SUYP	1.1121	AISI1010
㉙	Drain Plug 4)	Carbon Steel S25C	1.1158	AISI1025

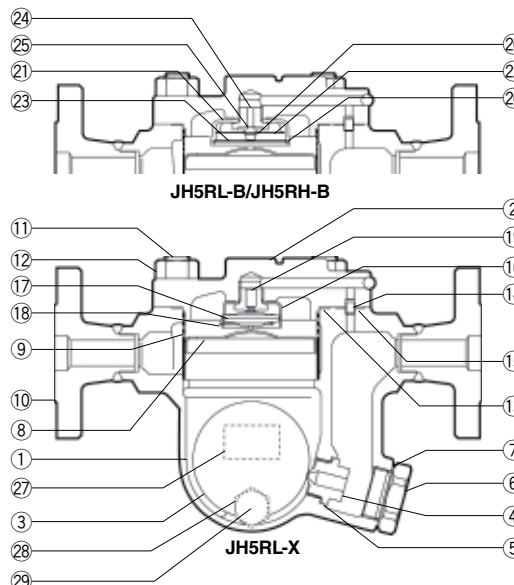


Copyright © TLV

1) Equivalent materials 2) JH5RL-B, JH5RH-B: inside only 3) Shown on reverse 4) Option  
 Replacement kits available: (M) maintenance parts, (R) repair parts, (F) float

**Dimensions**

● **JH5RL-X/JH5RL-B** Screwed

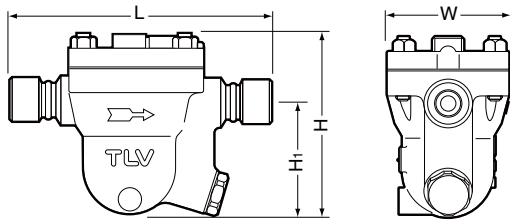


**JH5RL-X/JH5RL-B** Screwed\* (mm)

Size	L	H	H <sub>1</sub>	W	Weight (kg)
1/2"	234	162	105	115	6.5
3/4"	246				6.6
1"	258				6.7

\* BSP DIN 2999, other standards available

● **JH5RL-X/JH5RL-B/JH5RH-B** Socket Welded

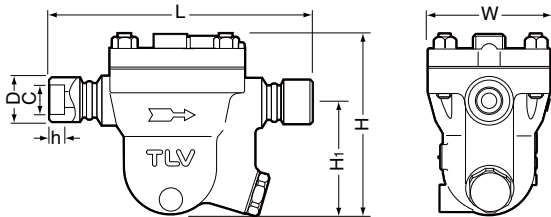


**JH5RL-X/JH5RL-B/JH5RH-B** Socket Welded\* (mm)

DN	L	H	H <sub>1</sub>	W	φD	φC	h	Weight (kg)
15	234	162	105	115	33	21.8	12	6.5 (10)
20	246				39.5	27.2	14	6.6 (10)
25	258				48	33.9		6.7 (10)
40	246				64	48.8		9.1 (13)
50					77.5	61.2		17

\* ASME B16.11-2005, other standards available

( ) JH5RH-B

● **JH5RL-X/JH5RL-B/JH5RH-B** Flanged

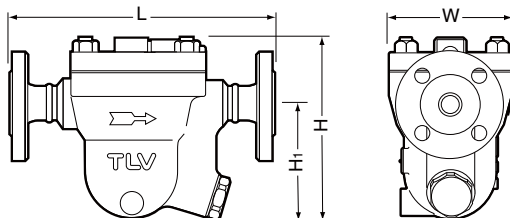

**JH5RL-X/JH5RL-B/JH5RH-B** Flanged (mm)

DN	L					H	H <sub>1</sub>	W	Weight*** (kg)
	DIN 2501 PN25*/40*	ASME Class							
		150RF	300RF	600RF	900RF**				
15	239	239	239	239	269	162 (175)	105 (107)	115 (125)	9.2 (14)
20	264	264	264	264	294				9.6 (16)
25	309	309	309	309	319				11 (20)
40	290	290	290	290	306				14 (24)
50	300	300	300	300	316				16 (36)

Other standards available, but length and weight may vary

\* Not available for JH5RH-B \*\* Not available for JH5RL-X/JH5RL-B


\*\*\* Weight is for DIN PN 25/40 (JH5RL-X/JH5RL-B),

ASME Class 900 RF (JH5RH-B)


( ) JH5RH-B

**Discharge Capacity**


● **JH5RL-X**

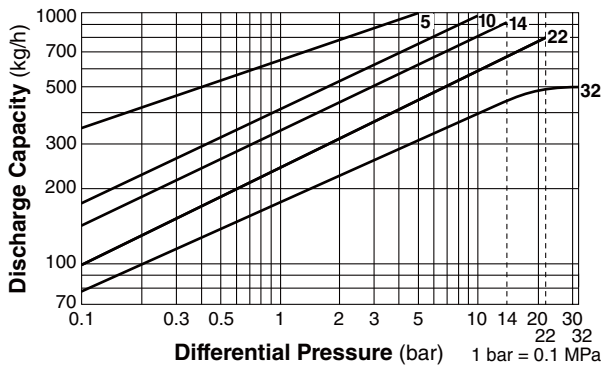

● **JH5RL-B/JH5RH-B**

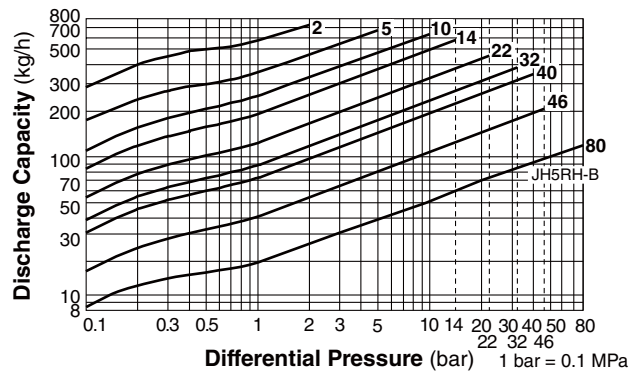

1. Line numbers within the graph are orifice numbers.
2. Differential pressure is the difference between the inlet and outlet pressure of the trap.
3. Capacities are based on continuous discharge of condensate 6°C below saturated steam temperature.
4. Recommended safety factor: at least 1.5.



DO NOT use traps under conditions that exceed maximum differential pressure, as condensate backup will occur!

Manufacturer

ISO 9001/ISO 14001



is approved by LRQA Ltd. to ISO 9001/14001

