


External electrical connections

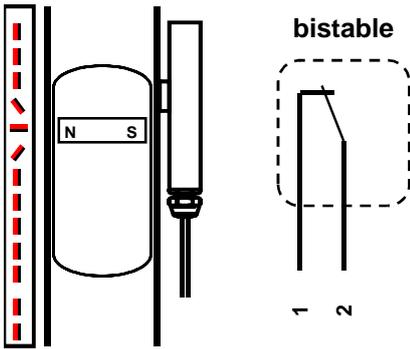

~ Installed opposite to indication rail
~ Cable exit downwards

Instruction manual

Function Magnetic switch for WEKA- VLI

The magnetic switch is mounted outside of the float chamber opposite to the indication rail. The switching logic can be reversed by inverting the switch module with cable-exit upwards or by installing the switch module adjacent to the indication rail where technically authorised (see datasheet 20010501). The magnet inside the float activates the reed switch, when the liquid in the float chamber reaches that level.

Please refer to the safety guidelines.

Product code

31130-NK

(with counter plug, without cable)


Switching logic

on/off, bistable

Contact rating

max. 250V
max. 1.3A
max. 80VA
max. 80W

Dimensions

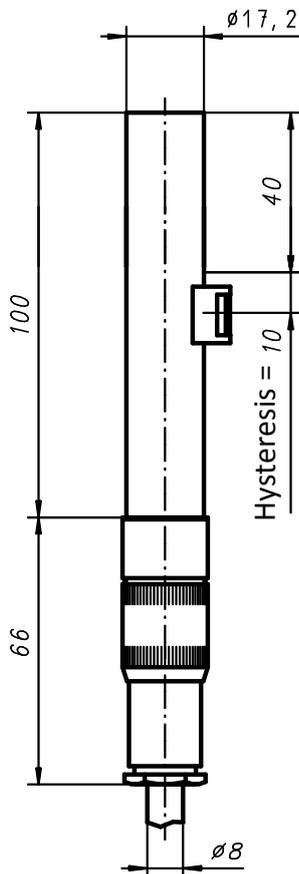

Enclosure

IP67 - plugged and locked (EN 60529)

Material

Housing: Stainless steel 316 /316L
Plug connector: Brass: chromium-plated
Seal: Perbunan (NBR)
Insert: 3-pole + PE
Connection: Solder-terminal
Cable cores: max. 1mm
Cable diameter: 6 to 8mm
Type label: Polyester: silver, black printing

Operating conditions

Media temperature	Ambient temperature
-50°C to +150°C	-20°C to +80°C

Media temperature
Ambient temperature

Temperature of liquid within the float chamber
Temperature of air around the magnetic switch

Fixation

When ordering level indicators with switches, hose clamps are included.
When ordering switches as spare parts, hose clamps are never included and must be ordered separately.
In case of ordering hose clamps pipe size must be indicated:

For pipe diameter 30 to 40mm Article no. 80648
For pipe diameter 40 to 57mm and 57 to 80mm Article no. 84043

Note

The switch is maintenance free.